

SUMASA

Características Técnicas

Technical Features - Caractéristiques Techniques



Montacargas hidráulico

Hydraulic Goods lift - Montecharge hydraulique

Características técnicas:

Technical features:

Caractéristiques techniques:

Velocidad nominal <i>Nominal speed</i> Vitesse nominale	0.5 m/s.
Carga Nominal Máx. <i>Max. Nominal load</i> Charge nominale maximum	10000 kg
Altura max. puertas <i>Maximum door height</i> Hauteur max. portes	5500 mm
Altura max. Cabina <i>Maximum car height</i> Hauteur max. cabine	6000 mm
Huida estándar <i>Standard headroom</i> HDN standard	3600 mm
Foso estándar <i>Standard pit</i> Cuvette standard	1200 mm
Recorrido Máximo <i>Max. Travel.</i> Course maximum	25 m.
Suspensión <i>Suspension</i> Suspension	1:1 / 2:1

- Para datos no contemplados consultar.


- Data referred to consult.

- Pour données pas illustrées consulter.




Montacargas hidráulico

Hydraulic Goods lift - Montecharge hydraulique

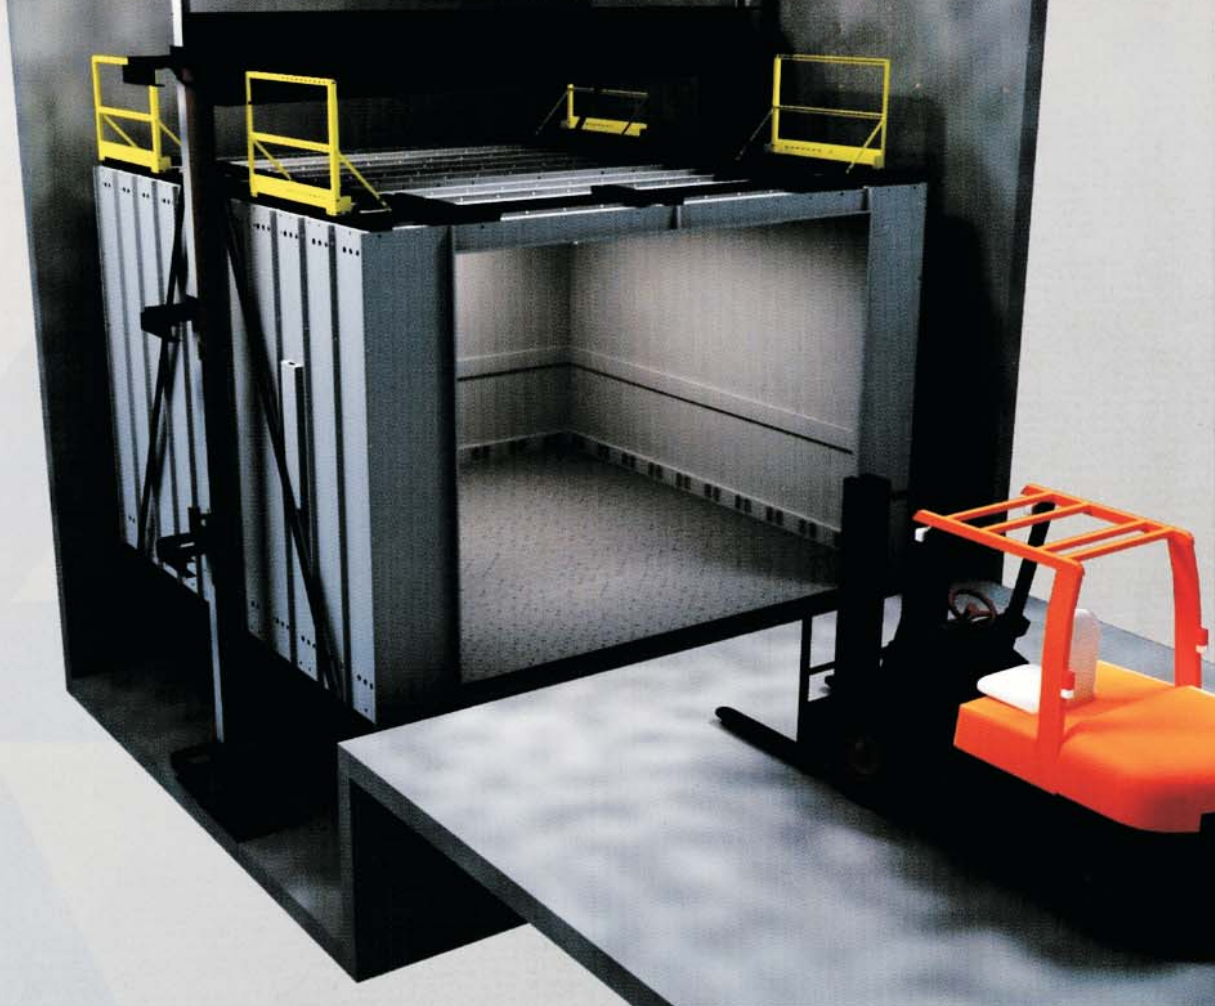

Plano de planta - Shaft drawing - Plan étage

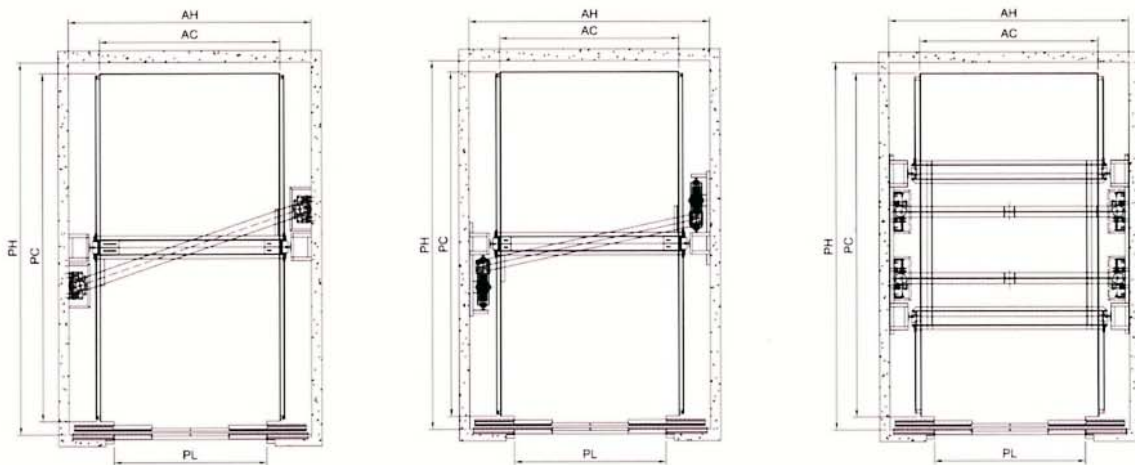

Q (Kg)	AH	PH	AC	PC	PL
2000	2500	2500	1800	2200	1500
2500	2900	2500	2200	2200	1800
3000	2900	2850	2200	2500	1900
3500	2950	3150	2250	2800	2200
4000	2950	3550	2250	3200	2200
5000	3200	3850	2500	3500	2400
6000	3200	4400	2500	4150	2400
8000	3300	5400	2600	5100	2500
10000	3800	5700	3100	5400	3000



PL: Paso Libre AH: Ancho Hueco PH: Profundidad Hueco AC: Ancho Cabina PC: Fondo cabina
 PL: Clear opening AH: Width Shaft PH: Deep shaft AC: Car width PC: Car Deep
 PL: Passage Libre AH: Largeur Gaine PH: Profondeur Gaine AC: Largeur Cabine PC: Profondeur Cabine